

## Swing Gate



## Specifications

Model No. JSTZ3902

Power Supply: 110V or 220V  $\pm 10\%$  50Hz/60Hz

Working temperature:  $-25^{\circ}\text{C} \sim 65^{\circ}\text{C}$

Relative Humidity:  $\leq 95\%$  no condensation

Open/Close Speed: 0.4~1.0s Adjustable

Power Rating: 100W

Input Interface: DC 12V level signal or pulse signal, pulse width  $>100\text{ms}$ , driving current  $>10\text{mA}$

Communication interface: RS485 standard

Communication distance: maximum 1200m

Operation Noise:  $\leq 65\text{dB}$


Lane Width: 600mm

Pass Speed: 20-30people/minute (Normal Open Mode), 15-20people/minute (Normal Close Mode)

MTBF: 3million times

Application: Indoor


Dimension: 1500mm (L)\*120mm(W)\*960mm(H)

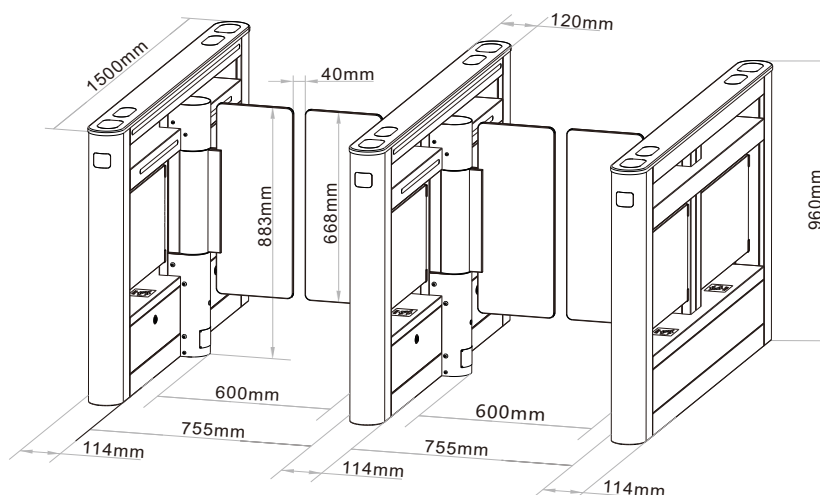

## Features

- > Full modernized design, fast pass speed.
- > Slim machine structure, save the installation space.
- > Humanized passage indicator, clearly show equipment status.
- > Build-in mini camera, take picture when slapping card, which can link with DVR.
- > Full passage protection such as anti-clap function, firm linkage protection, auto open when power off, ensure the safety for different status(normal & emergency)
- > Build-in middle range card reading mode, passing through without slapping card.
- > Support multiple medium such as 2D card, IC card, and can be used in visitor management system.

## Layouts

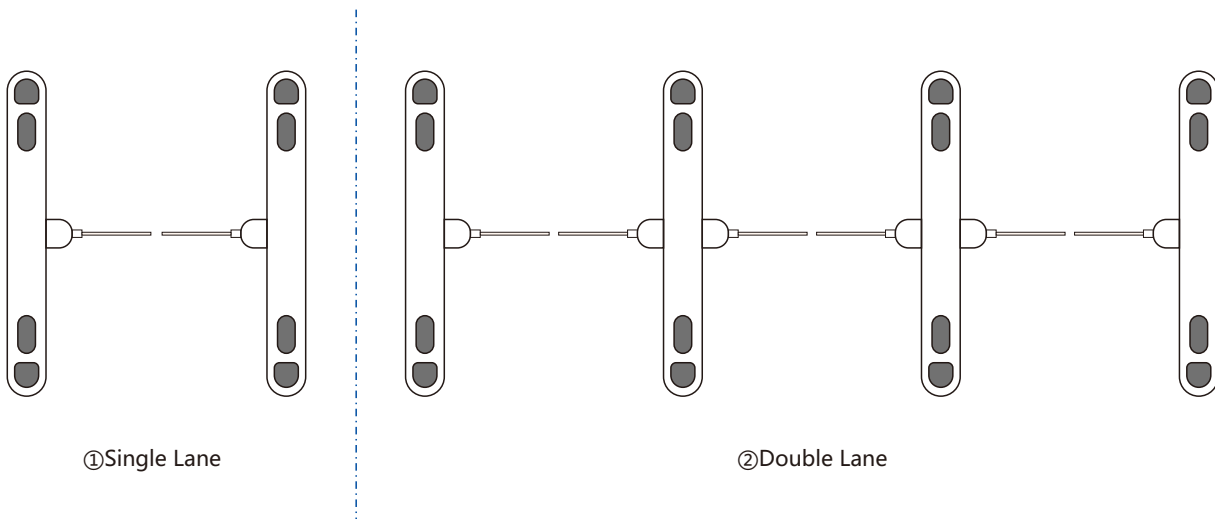

## Cases



Shanghai EXPO



Shanghai EXPO